



RAS3-NPT VALVOLE A SFERA A 3 VIE 3 WAYS BALL VALVES

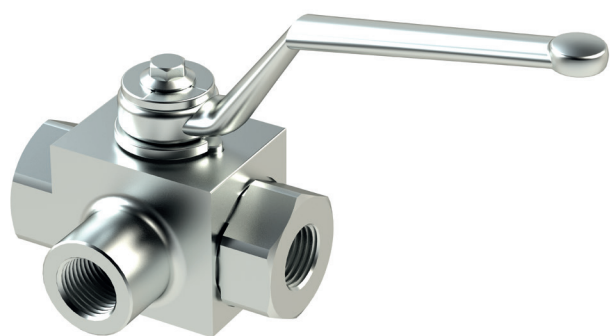

SCHEMA IDRAULICO / HYDRAULIC CIRCUIT

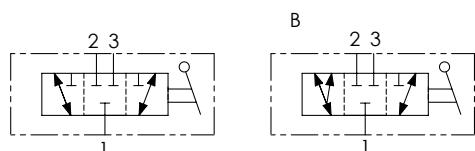

CODICE ORDINAZIONE
ORDERING CODE



01	02	03	04	05
RAS3	NPT			

01	VALVOLE A SFERA A 3 VIE (3 WAYS BALL VALVES)	RAS3
02	DIMENSIONE (SIZE)	NPT 1/8 180
		NPT 1/4 140
		NPT 3/8 380
		NPT 1/2 120
		NPT 3/4 340
		NPT 1 100
		NPT 1-1/4 114
03	FILETTATURA (THREAD)	NPT NPT
		Standard /
04	SCHEMA (CIRCUIT)	Schema B B
		Fori di fissaggio (Fixing ports) P

DATI TECNICI / TECHNICAL DATA

Olio idraulico - Mineral oil	ISO 6743/4 (DIN 51524)
Viscosità olio - Oil viscosity	15-250 mm ² /s (15 to 250 cSt)
Classe di contaminazione max Max contamination index	ISO 4406:1999 Classe 19/17/14
Temperatura dell'olio - Oil temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente - Environment temperature	-20°C +50°C -4°F +122°F

È indispensabile l'utilizzo di un filtro per proteggere la valvola (filtrazione consigliata 15 µm)
It is necessary a filter use to protect the valve (advised filtration 15 µm)

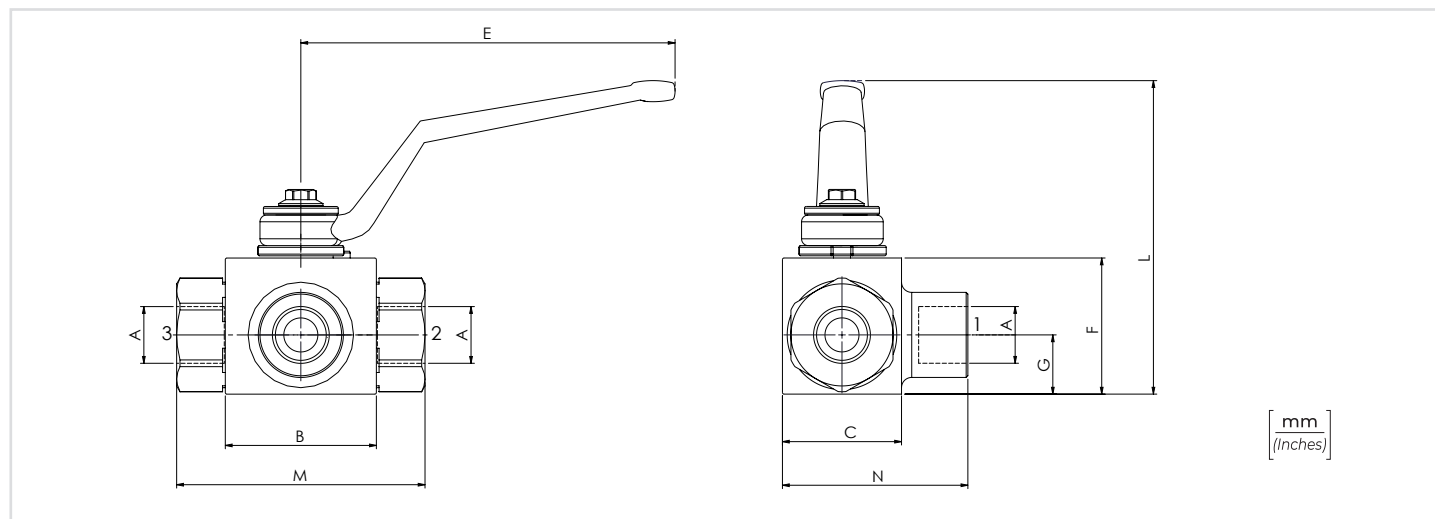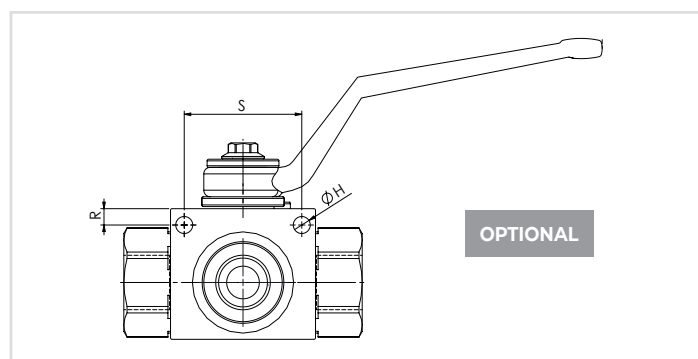

CARATTERISTICHE TECNICHE / TECHNICAL CHARACTERISTICS

TIPO TYPE	A	PORTATA MAX MAX FLOW l/min-USgpm	PRESSIONE MAX MAX PRESSURE bar-PSI	B	C	E	F	G	H	L	M	N	R	S	PESO APPROX APPROX WEIGHT kg-lbt	
RAS3180NPT	NPT 1/8	15 (4)	400 (5800)	42,4 (1.67)	30 (1.18)	110 (4.33)	35 (1.38)	14,5 (0.57)	5,2 (0.20)	91,5 (3.60)	71 (2.80)	48,5 (1.91)	4,5 (0.18)	34 (1.34)	0,6 (1.3)	
RAS3140NPT	NPT 1/4	25 (6.6)		44,4 (1.75)	35 (1.38)		40 (1.57)	17,5 (0.69)		96,5 (3.80)	73 (2.87)	54,5 (2.15)	5 (0.20)	36 (1.42)	0,7 (1.5)	
RAS3380NPT	NPT 3/8	35 (9.2)		48,4 (1.91)	37 (1.46)		43 (1.69)	18 (0.71)		99,5 (3.92)	83 (3.27)	58,5 (2.30)	6 (0.24)	50 (1.97)	0,8 (1.8)	
RAS3120NPT	NPT 1/2	60 (15.8)		62,5 (2.46)	45 (1.77)		55 (2.16)	23,5 (0.93)		106,5 (4.19)	95 (3.74)	75 (2.95)			1,6 (3.5)	
RAS3100NPT	NPT 1	100 (26.4)	350 (5075)	66,5 (2.62)	55 (2.17)	180 (7.09)	65 (2.56)	29,5 (1.16)	6,2 (0.24)	112 (4.41)	120 (4.72)	87,5 (3.44)	6 (0.24)	50 (1.97)	2,4 (5.3)	
RAS3114NPT	NPT 1-1/4	150 (89.6)								116,5 (4.59)					120 (4.72)	2,6 (5.7)
RAS3112NPT	NPT 1-1/2									124 (4.88)					124 (4.88)	2,8 (6)